



B118W

Economical

Wax • Flat head

- Excellent blackness
- High sensitivity
- Low energy printing

PRINTING PROPERTIES

Maximum printing speed 12 IPS

	Non top-coated paper	Top-coated paper	High gloss paper	Synthetics
Compatibility	✓	✓	✓	△ Limited

Application



Tags



Logistic/Storage
Shipping



Healthcare



Multi purpose
label



Food
ingredient

RIBBON PROPERTIES

- Total ribbon thickness: < 8 µm
- Polyester film thickness: 4.5 µm
- Ink melting point: 65°C
- Friction coefficient: < 0.2

GENERAL CONDITION

Usage conditions: 5 to 35°C at 20 to 80% of relative humidity.

Storage conditions: Keep indoors avoiding high temperatures (Such as beside the heat source), high humidity, and direct sunlight.

Storage life: 24 months after production.




Scan to visit product's page

PRINTED IMAGE DURABILITY

TESTS	RESULT
Darkness	2.1 ± 0.1
Print quality	ANSI A
Mechanical resistance	level 2 on a scale of 4
Temperature resistance	50°C - 60°C

B118W DURABILITY

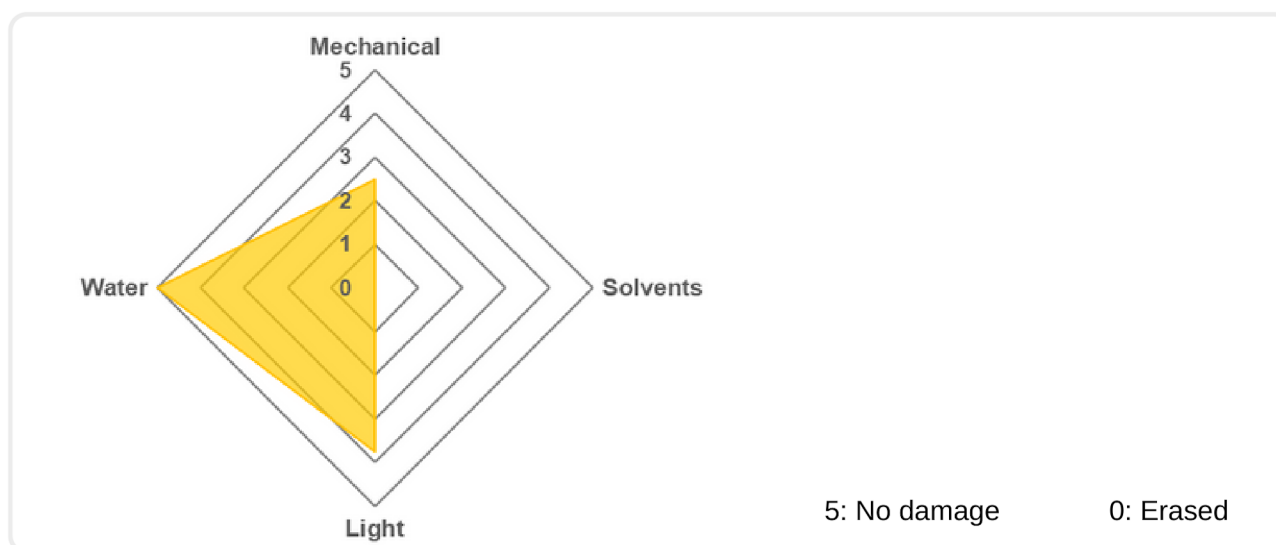

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LTD.

F17, E.Town Central, 11 Doan Van Bo, Ward 13, District 4, HCM City

Tel: +84 28-3528-5252

Fax: +84 28-3636-7211

Email: thermal@ricoh.com.vn

Website: <https://ricoh.com.vn/products/thermal>

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet



Scan to visit product's page