

B118W





Economical

Wax • Flat head

- Excellent blackness
- High sensitivity
- Low energy printing

PRINTING PROPERTIES

Maximum printing speed 12 IPS

	Non top-coated paper	Top-coated paper	High gloss paper	Synthetics
Compatibility				 Limited

RIBBON PROPERTIES

- Total ribbon thickness: < 8 µm
- Polyester film thickness: 4.5 µm
- Ink melting point: 65°C
- Friction coefficient: < 0.2

CERTIFICATION



Application



Tags



Logistic/Storage
Shipping



Multi purpose
label



Food
ingredient



Scan to visit product's page

GENERAL CONDITION

Usage conditions: 5 to 35°C at 20 to 80% of relative humidity.

Storage conditions: Keep indoors avoiding high temperatures (Such as beside the heat source), high humidity, and direct sunlight.


Storage life: 24 months after production.

RICOH
imagine. change.

PRINTED IMAGE DURABILITY

TESTS	RESULT
Darkness	2.1 ± 0.1
Print quality	ANSI A
Mechanical resistance	level 2 on a scale of 4
Temperature resistance	50°C - 60°C

B118W DURABILITY

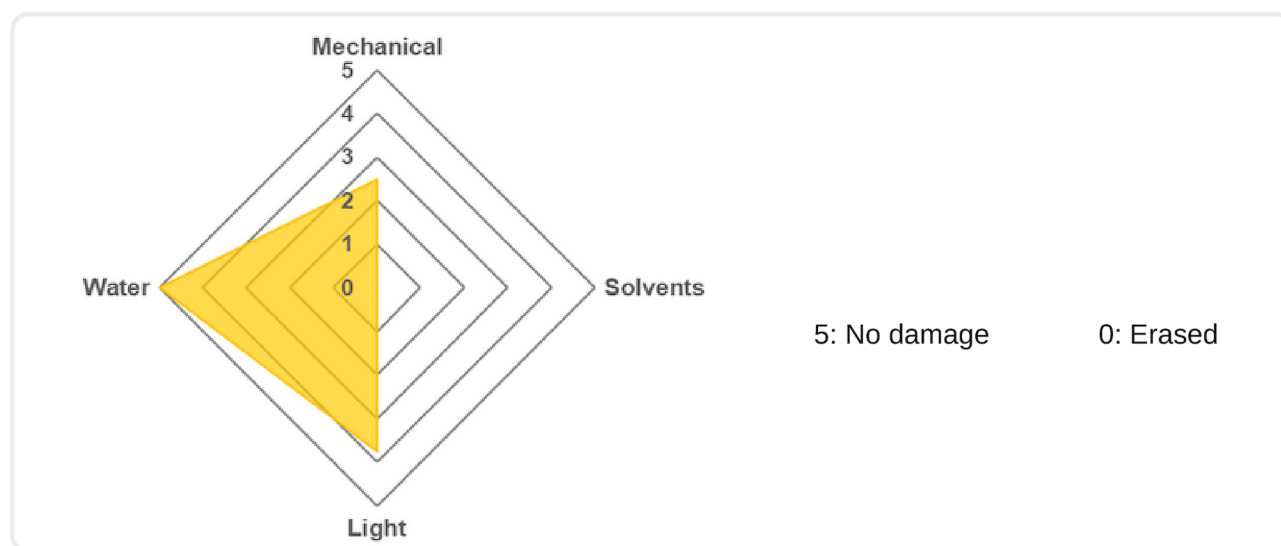

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LIMITED

Address: F17, E.town Central, 11 Doan Van Bo Street, Ward 13, District 4, HCMC

Tel: +84 28-3528 5252

Fax: +84 28-3636 7211

Email: Thermal@ricoh.com.vn

Website: www.ricoh.com.vn/products/thermal

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet



Scan to visit product's page