

D110C

High durability

Resin • Flat head • Near edge

- Printing on receiving cloths (nylon, polyester, acetate).
- Superior ironing resistance at temperature up to 150°C.
- The printed image is very resistant to water washing, dry cleaning, stone wash and bleach.
- Higher sensitivity and image density
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head.

PRINTING PROPERTIES

Maximum printing speed 6 IPS

	Nylon	Polyester satin	Acetate
Compatibility	✓	✓	✓
Image density	1.79	1.57	1.55

Image resolution for paper & film:

Minimum size: - For the lines: 4.0 mm

- For the characters: 1.0mm

RIBBON PROPERTIES

- Total ribbon thickness: < 9 µm
- Polyester film thickness: 4.5 µm
- Friction coefficient: < 0.045
- Ink melting point: 83°C
- Tearing resistance: > 200N/mm²
- Transmission density: 1.40 mini

CERTIFICATES



Application



Care label



Scan to visit product's page

GENERAL CONDITION

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage conditions: Keep indoors avoiding high temperatures (such as beside a heat source), high humidity, and direct sunlight.


Storage life: 24 months after slitting day.

RICOH
imagine. change.

PRINTED IMAGE DURABILITY

TESTS with standard nylon care labels	RESULTS
Standard wash 25 washing at 40°C during 45 min • Test ISO C06A1M	ANSI > B
Standard wash 25 washing at 60°C during 45 min • Test ISO C06A1M	ANSI > B
Stone wash 1 time	ANSI > C
Dry cleaning 5 times	ANSI > B
Direct & indirect ironing (150°C) 20 back and forwards	ANSI > B
Bleaching diluted to 5% during 2h	ANSI > B
Light Xenon lamp at 650W/m ² during 1 month	ANSI > B

D110C DURABILITY

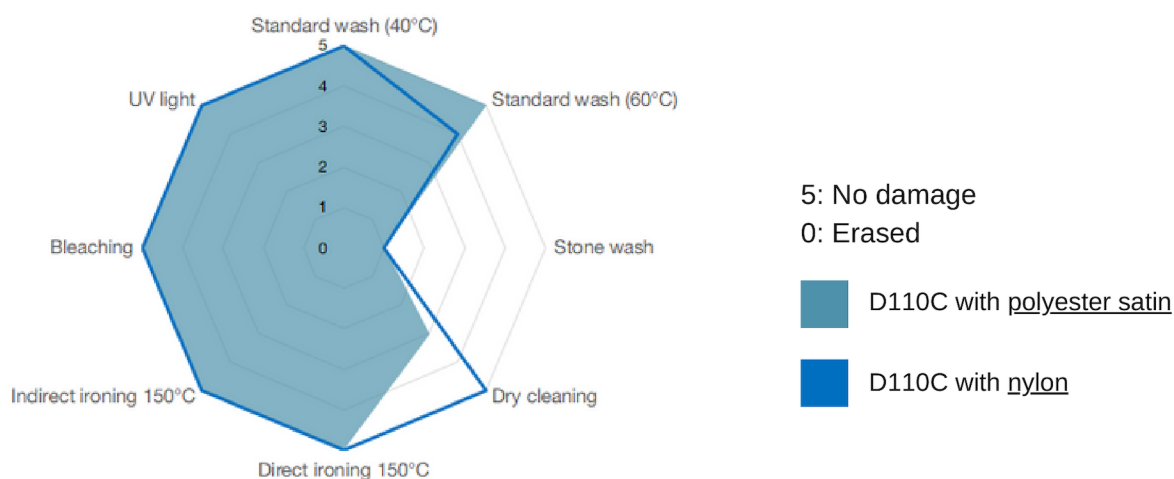

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LIMITED

Address: F17, E.town Central, 11 Doan Van Bo Street, Ward 13, District 4, HCMC

Tel: +84 28-3528 5252

Fax: +84 28-3636 7211

Email: Thermal@ricoh.com.vn

Website: www.ricoh.com.vn/products/thermal

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet



Scan to visit product's page

Version 3/2024