

B115A

Multipurpose

Wax-Resin • Flat head

- High sensitivity
- Scratch resistance
- High resolution
- Applicable to a wide range of receiving materials

PRINTING PROPERTIES

	Top-coated paper	Gloss coated paper	Synthetic paper	PET
Compatibility				

Note: Smoothness Bekk for paper family must be over 200s.

RIBBON PROPERTIES

- Polyester film thickness: 4.5 μm
- Friction coefficient: < 0.035
- Tearing resistance: > 200N/mm²
- Transmission density: 1.20 mini

CERTIFICATES/ COMPLIANCE



Application



Tags



Ticket



Logistic/Storage
Shipping



Healthcare



Asset label
signage



Scan to visit product page

GENERAL CONDITION

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage conditions: Keep indoors avoiding high temperature, high humidity, and direct sunlight.


Storage life: 24 months after production.

RICOH
imagine. change.

PRINTED IMAGE DURABILITY

TESTS	RESULT
Scratch resistance 50 back and forwards with a rub tester	ANSI 4.0A
Heat (40°C)	ANSI 4.0
Finger rub resistance	ANSI 3.5A

B115A CHARACTERISTICS

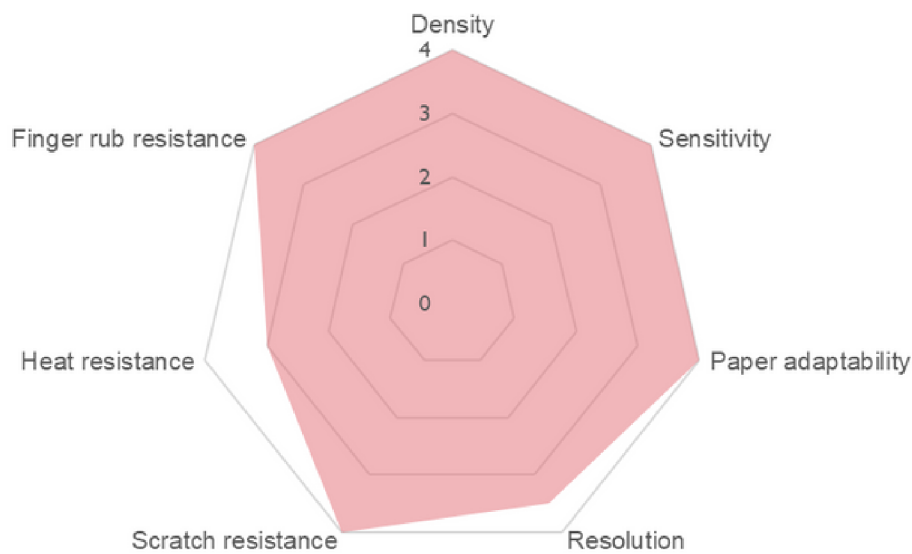

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LIMITED

f17, E.town Central, 11 Doan Van Bo Street, Ward 13, District 4, HCMC

Tel: +84 28-3528 5252

Fax: +84 28-3636 7211

Email: Thermal@ricoh.com.vn

Website: www.ricoh.com.vn/products/thermal



Scan to visit product's page

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet

Version 3/2024