





# B115W

Wax • Flat head

- Excellent blackness
- High sensitivity
- Low energy printing
- Application to a wide range of receiving labels: paper, coated paper, PET/PP/PE/PVC films...

## PRINTING PROPERTIES

Maximum printing speed 12 IPS

|               | Non<br>top-coated paper   | Top-coated paper  | High gloss<br>paper  | Synthetics  |
|---------------|---|---|--|---|
| Compatibility |  |  |  | <br><i>Limited</i> |

## RIBBON PROPERTIES

- Total ribbon thickness: < 9  $\mu\text{m}$
- Polyester film thickness: 4.5  $\mu\text{m}$
- Ink melting point: 65°C
- Friction coefficient: < 0.2

## CERTIFICATES/ COMPLIANCE



## Application



Tags



Logistic/Storage  
Shipping



Multi purpose  
label



Food  
ingredient



Scan to visit product's page

# GENERAL CONDITION



Usage conditions: 5 to 35°C at 20 to 80% of relative humidity.  
Storage conditions: Keep indoors avoiding high temperatures (Such as beside the heat source), high humidity, and direct sunlight.  
Storage life: 24 months after production.



## PRINTED IMAGE DURABILITY

| TESTS           | RESULT     |
|-----------------|------------|
| Smear           | ANSI > C   |
| Heat resistance | Up to 60°C |
| Light           | ANSI B     |
| Water           | ANSI A     |

## B115W DURABILITY

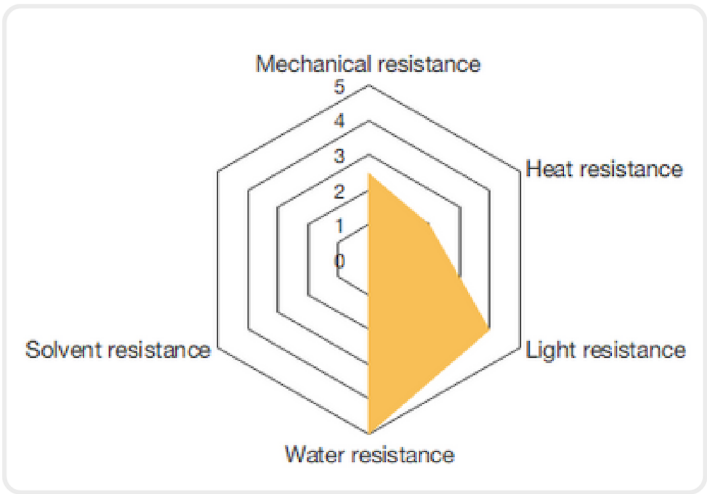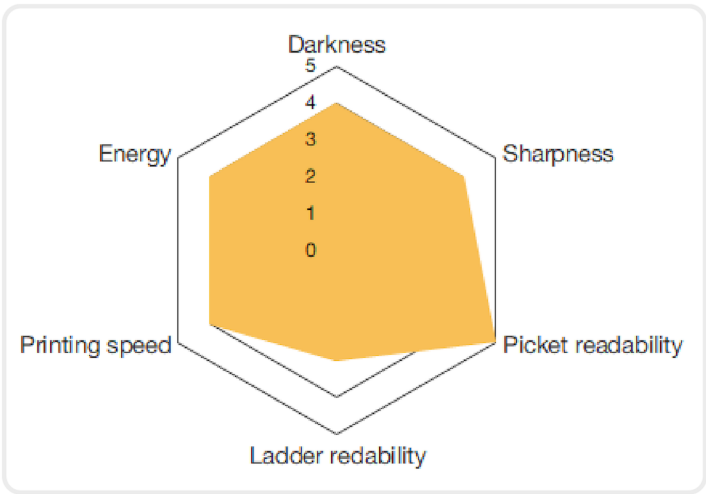

5: No damage      0: Erased

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

**RICOH VIETNAM COMPANY LTD.**  
F17, E.Town Central, 11 Doan Van Bo, Ward 13, District 4, HCM City  
Tel: +84 28-3528-5252      Fax: +84 28-3636-7211  
Email: [thermal@ricoh.com.vn](mailto:thermal@ricoh.com.vn)      Website: <https://ricoh.com.vn/products/thermal>



Scan to visit product's page

\* Specifications are subjected to change without notice.  
\* The color(s) of the actual product may vary from the color(s) shown in this datasheet