

B115W

Dòng đa ứng dụng

Wax • Flat head

- Excellent blackness
- High sensitivity
- Low energy printing
- Application to a wide range of receiving labels: paper, coated paper, PET/PP/PE/PVC films...

PRINTING PROPERTIES

Maximum printing speed 12 IPS

	Non top-coated paper	Top-coated paper	High gloss paper	Synthetics
Compatibility	✓	✓	✓	△ Limited

RIBBON PROPERTIES

- Total ribbon thickness: < 9 µm
- Polyester film thickness: 4.5 µm
- Ink melting point: 65°C
- Friction coefficient: < 0.2

GENERAL CONDITION

Usage conditions: 5 to 35°C at 20 to 80% of relative humidity.

Storage conditions: Keep indoors avoiding high temperatures (Such as beside the heat source), high humidity, and direct sunlight.

Storage life: 24 months after production.

Application



Tags



Logistic/Storage
Shipping



Healthcare



Multi purpose
label



Food
ingredient





Scan to visit product's page

PRINTED IMAGE DURABILITY

TESTS	RESULT
Smear	ANSI > C
Heat resistance	Up to 60°C
Light	ANSI B
Water	ANSI A

B115W DURABILITY

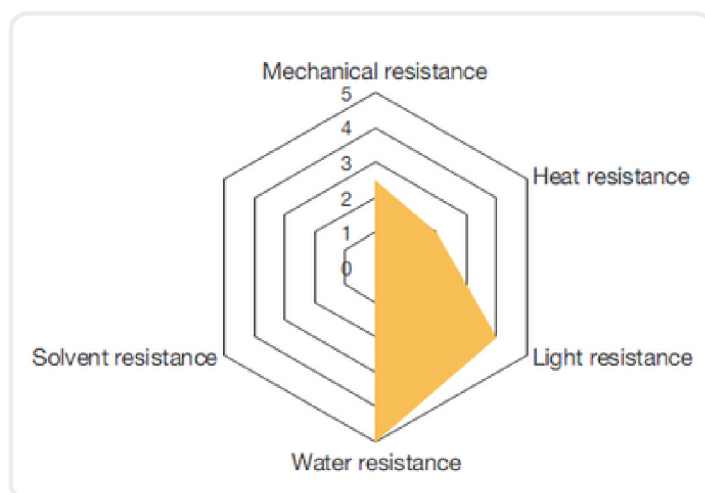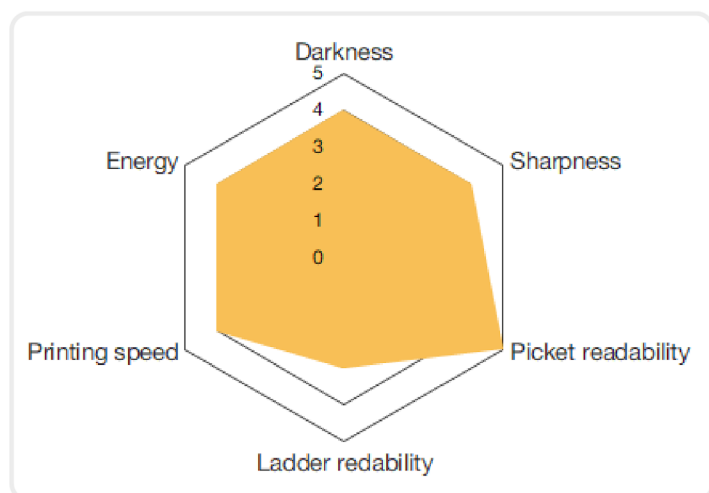

5: No damage

0: Erased

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LTD.

F17, E.Town Central, 11 Doan Van Bo, Ward 13, District 4, HCM City

Tel: +84 28-3528-5252

Fax: +84 28-3636-7211

Email: thermal@ricoh.com.vn

Website: <https://ricoh.com.vn/products/thermal>



Scan to visit product's page

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet